




For brads type  
SK 400

# BeA Cordless Nailer SK464-652E

- Light and well balanced
- Ergonomic handgrip
- Rear loading
- Rafter hook
- Depth adjustment
- No-mark-nose for sensitive surfaces
- Quick release
- Single shot actuation
- High performance battery
- Indicator light for battery charge
- For brads type SK 400 from 25 - 64 mm

## Applications

Interior fittings, furniture industry, window production, corner bonds, cabinets, small crates etc.

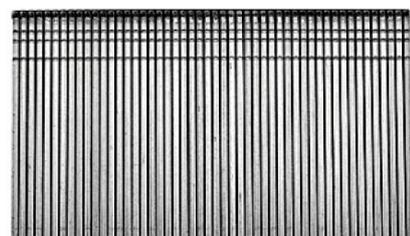

## BeA SK464-652E


### Technical Data



Item code	12100520
EAN-No.	4045759052678
Magazine type	Rear loader
Safety system	Single shot
Fastener type	Brads type SK 400
Nail length	25 - 64 mm
Magazine capacity	100 nails
Nails per strip	50 nails per strip
Shots per second	2 - 3 nails
Shot limit	500 shots / hour
Charging time of battery	120 min.
Battery voltage	6 Volt
Shots per battery charge	up to 4,000
Shots per fuel cell	up to 1,100
Dimension L/W/H, mm	320 / 86 / 270
Weight	2.15 kg
Emission sound pressure level at the workstation	$L_{pA, 1s, d} = 89.2 \text{ dB}$
Single shot emission sound pressure level	$L_{WA, 1s, d} = 94.61 \text{ dB}$
Vibration level as per ISO 8662-11 is	1.96 $\text{m/s}^2$ .
Supplied accessories	Sturdy case, two high capacity batteries, charger, safety glasses, instruction manual

Subject to technical modifications

### Brads type SK 400



Diameter	1.6 x 1.4 mm
Length	25 - 64 mm
Material	NK = steel, electro- galvanized, service class 2 RF = stainless steel, comparable to material 1.4301
Surface property	HZ = Steel, resin coated to attain higher withdrawal values
Shank property	Smooth

BeA Fastening System Ltd.  
Behrens House  
Plaxton Bridge Road, Woodmansey  
East Yorkshire, HU17 0RT

Further Information:  
Phone: 01482 889911  
Fax: 01482 889949  
sales@uk.bea-group.com  
www.bea-group.com

BeA is a member of following associations:

